

Braukmann

HS10S-LF

Lead-free combination water supply unit

Application

HS10S combination water supply units integrate a check valve with test point, reverse rinsing fine filter, pressure reducing valve and shut-off valve in one appliance. They ensure a continuous supply of filtered water. The fine filter prevents the ingress of foreign bodies, for example rust particles, strands of hemp and grains of sand and thus reduces the probability of corrosion. The check valve protects the mains water system against back pressure, backflow and back syphonage of health threatening liquids. The pressure reducing valve prevents over-pressure damage and reduces water consumption.

All individual units correspond to the requirements of current DIN/DVGW specifications. Technical features of each unit also apply to the combination assembly.

Approvals

- DVGW in progress
- SVGW in progress

approval for all filters with 100 µm mesh sizes

Special Features

- LEAD-FREE: Pb content of all materials less than 0.1 %
- Double Spin Technology for connection sizes $\frac{3}{4}$ " to $1\frac{1}{4}$ "; cartridge with external rotor enabling simultaneous cleaning in lower and upper filter areas; visual function check possible
- Impeller Technology for connection sizes $1\frac{1}{2}$ " and 2". Rotating impeller for improved reverse cleaning
- Especially compact because pressure reducing valve, fine filter, check valve and shut-off valve are combined in one unit
- Filtered water supplied even during reverse rinsing
- Patented reverse rinsing system - fast and thorough cleaning of the filter with small amount of water
- Automatic reverse rinsing actuator with ISO-flange connector can be retrofitted
- Shock resistant clear synthetic material filter bowl enables easy checking of filter contamination
- Inlet pressure balancing – no influence on outlet pressure by fluctuating inlet pressure
- Filter and complete filter bowl are replaceable
- The valve insert is of high-quality synthetic material and can be fully exchanged
- All materials are KTW approved
- Approved by TÜV LGA for low noise, Group 1 without limitations
- 5-year warranty


Product Specification Sheet • EN0H-1101GE23 R0825 • Subject to change



Technical Data

Medium	
Medium:	Drinking water
Connections/Sizes	
Connection size:	$\frac{3}{4}$ " - 2"
Pressure values	
Min. operating (dynamic) pressure:	1.5 bar
Max. inlet pressure with clear filter bowl:	16 bar
Max. inlet pressure with lead free brass filter bowl:	25 bar
Outlet pressure:	1.5 - 6 bar
Operating temperatures	
Max. operating temperature medium accord. to EN 1567:	30 °C
Max. operating temperature medium (10 bar/lead free brass filter bowl):	70 °C
Specifications	
Installation position:	Horizontal with filter bowl downwards

Construction

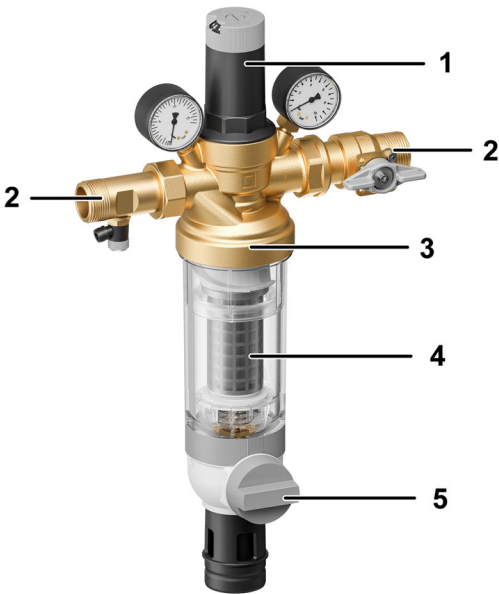Overview		Components	Materials
	1	Spring bonnet with adjustment knob and setting scale	High-quality synthetic material
	2	Threaded male connections (Options AA and AAM)	Lead-free brass
	3	Housing with inlet and outlet pressure gauges	Lead-free brass
	4	Fine filter in clear filter bowl	Stainless steel fine filter, shock-resistant, clear transparent synthetic material or lead-free brass filter bowl
	5	Ball valve with drain connection	Lead-free brass (Ball Valve body), Stainless steel (ball), Plastic-durethan (drain adapter)
Not depicted components:			
		Shut-off valve	Lead-free brass
		Check valve on inlet	High-grade synthetic material
		Test point for check valve	High-grade synthetic material
		Valve insert complete with diaphragm and valve seat	High-quality synthetic material, EPDM diaphragm
		Seals	EPDM
		Double wring wrench	Plastic

Method of Operation

The combination water supply unit combines check valve, reverse rinsing fine filter, pressure reducing valve and shut-off valve in one appliance.

Water flows first through the check valve. This causes the valve stem to push against the spring force and open the valve. The downstream reverse rinsing fine filter holds back any dirt particles in the water. These particles are then completely flushed out by reverse rinsing.

Filters with Double Spin Technology have turbine blades which circulate the water and thereby set the rotor on the upper filter into a rotational motion. The internal impeller rinses off particles that have adhered to the upper filter at the intersecting points with the rotor.

The integral pressure reducing valve functions on a balanced force principle whereby the force exerted by a diaphragm is balanced against the force of an adjustment spring. The inlet pressure has no influence on opening or closing of the valve. Inlet pressure fluctuation does not therefore affect the outlet pressure.

Transportation and Storage

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	85 % *


*non condensing

Installation Guidelines

Setup requirements

- Install in horizontal pipework with filter bowl downwards
 - This position ensures optimum filter efficiency
- Install shut-off valve at the inlet
- These filters are armatures which need to be maintained regularly
- Ensure good access (consider EN1717 requirements)
 - Pressure gauge can be read off easily
- Degree of contamination can be easily seen with clear filter bowl
- Simplifies maintenance and inspection
- The installation location should be protected against frost
- Related to the EN 806-2 it is recommended to install the filter immediately after the water meter
- In order to avoid flooding, it is recommended to arrange a permanent, professionally dimensioned wastewater connection

Installation Example

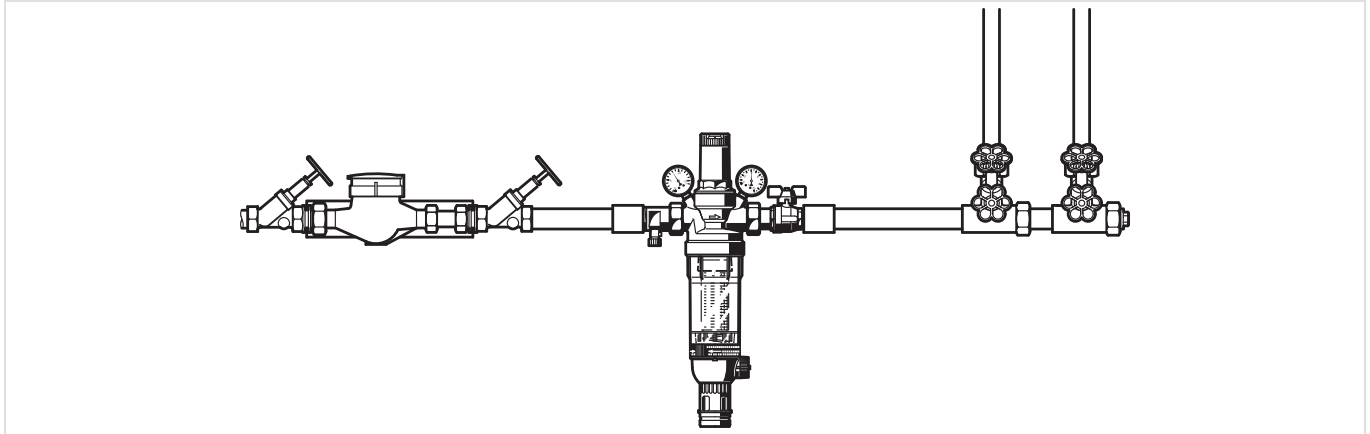


Technical Characteristics

kvs-Values

Connection size:	20	25	32	40	50
k_{VS} -value (m^3/h):	3.2	7.6	8.9	12.6	13.0
Peak flow rate at 2m/s (m^3/h):	2.3	3.6	5.8	9.1	14.0
Peak flow rate at 3m/s (m^3/h):	3.3	5.4	8.6	13.7	21.1


Note: Peak flow rate of 2m/s applies to residential buildings in accordance with DIN EN 156.
Peak flow rate of 3m/s applies to commercial systems in accordance with DIN 1988.

Pressure drop characteristics

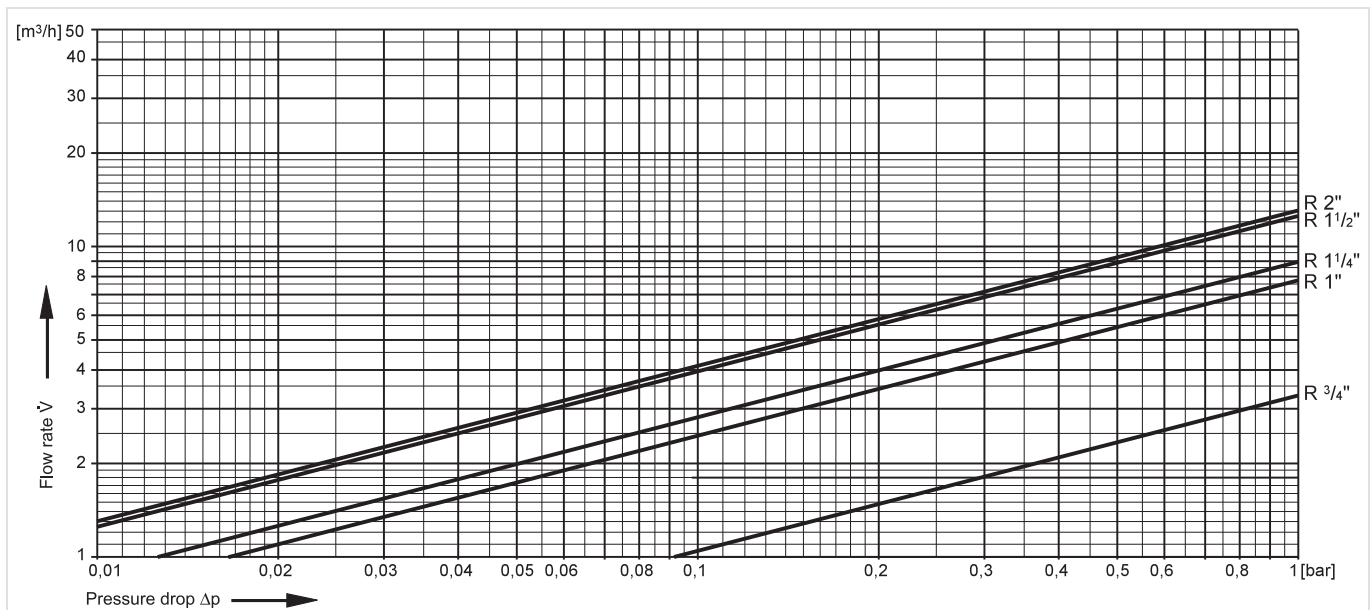

Dimensions

Overview

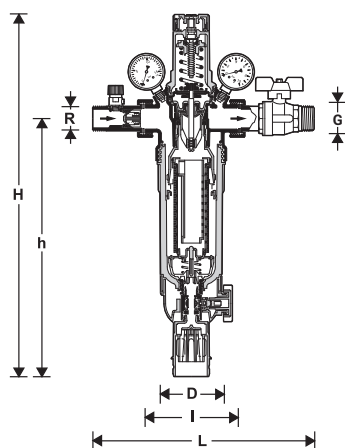

Parameter		Values				
Nominal size diameter:	DN	20	25	32	40	50
Connection size:	R	3/4"	1"	1 1/4"	1 1/2"	2"
	G	1"	1 1/4"	1 1/2"	2"	2 1/2"
Dimensions:	L	249	286	307	351	381
	I	110	130	130	150	150
	H	439	493	493	590	590
	h	350	353	353	417	417
	D	97	97	97	120	120
Weight:	kg	4.1	5.7	6.3	8.1	10
Double Spin Technology:		Yes	Yes	Yes	No	No
Impeller Technology:		Yes	Yes	Yes	Yes	Yes

Note: All dimensions in mm unless stated otherwise.

Ordering Information

The following tables contain all the information you need to make an order of an item of your choice.

Options

Connection size	Nominal size diameter	Filter bowl	Max. medium temperature	Item No.
Standard version, threaded male connections				
3/4"	DN 20	Plastic	30 °C	HS10S-3/4LFAA
1"	DN 25	Plastic	30 °C	HS10S-1LFAA
1 1/4"	DN 32	Plastic	30 °C	HS10S-11/4LFAA
1 1/2"	DN 40	Plastic	30 °C	HS10S-11/2LFAA
2"	DN 50	Plastic	30 °C	HS10S-2LFAA
Brass filter bowl, threaded male connections				
3/4"	DN 20	Brass	70 °C	HS10S-3/4LFAAM
1"	DN 25	Brass	70 °C	HS10S-1LFAAM
1 1/4"	DN 32	Brass	70 °C	HS10S-11/4LFAAM
1 1/2"	DN 40	Brass	70 °C	HS10S-11/2LFAAM
2"	DN 50	Brass	70 °C	HS10S-2LFAAM
Threaded male connections, without ball valve				
3/4"	DN 20	Plastic	30 °C	HS10S-3/4LFZS
1"	DN 25	Plastic	30 °C	HS10S-1LFZS
1 1/4"	DN 32	Plastic	30 °C	HS10S-11/4LFZS
1 1/2"	DN 40	Plastic	30 °C	HS10S-11/2LFZS
2"	DN 50	Plastic	30 °C	HS10S-2LFZS

Accessories

	Description	Dimension	Item No.
	RR11S	Automatic reverse rinsing actuator	
		For automatic filter cleaning at presettable intervals	
		230 V, 50/60 Hz, with BMS connection; wall power adaptor EU	RR11S-A
		230 V, 50/60 Hz, with BMS connection; wall power adaptor UK	RR11S-AGB
	URS	Retrofit kit F76S/HS10S	
		for filter Bowl up to May 2025 with backwash actuator RR11S	1/2" - 1 1/4"
		for filter Bowl up to May 2025 with backwash actuator RR11S	1 1/2" - 2"
		for filter Bowl from June 2025 on with backwash actuator Z11S	3/4" - 1 1/4"
		for filter Bowl from June 2025 on with backwash actuator Z11S	1 1/2" - 2"
	L5	WiFi water leak shut off actuator	
		For automatic shut-off via sensor cable or remote control via Resideo Mobile App up to 1 1/4"	
		230 V, 50/60 Hz, WLAN, wall power adaptor EU comes with water leak detector cable 1.5 m	VB-SP02Y001E
		230 V, 50/60 Hz, WLAN, wall power adaptor UK comes with water leak detector cable 1.5 m	VB-SP02Y001W
	VST06B	Connection set	
		Solder connections	
			3/4"
			1"
			1 1/4"
			1 1/2"
			2"
	ZR10K	Double ring wrench for removing the filter bowl	
			3/4"
			1" + 1 1/4"
			1 1/2" + 2"

Spare Parts

HS10S Filter Combinations from 2025 onwards

Overview	Description	Dimension	Item No.
	1 Valve insert complete (without filter)		
		3/4"	D06FA-1/2
		1" + 1/4"	D06FA-1A
		1 1/2" + 2"	D06FA-11/2
	2 Spring bonnet complete with setting scale		
		3/4"	0902002
		1" + 1 1/4"	0902003
		1 1/2" + 2"	0902004
	3 Union seal washer (10 pcs.)		
		3/4"	0901444
		1"	0901445
		1 1/4"	0901446
		1 1/2"	0901447
		2"	0901448
	4 Check valve cartridge		
		3/4"	2110200
		1"	2164400
		1 1/4"	2164500
		1 1/2"	2164600
		2"	2164700
	5 Test valve		
		3/4" - 2"	2421100
	6 Pressure gauge		
		0 - 10 bar	M38K-LFA10
		0 - 16 bar	M38K-LFA16
		0 - 25 bar	M38K-LFA25
	7 Filter insert complete*		
	Filter mesh size: 100 µm	3/4"	AF11S-1/2A
	Filter mesh size: 20 µm	3/4"	AF11S-1/2B
	Filter mesh size: 50 µm	3/4"	AF11S-1/2C
	Filter mesh size: 200 µm	3/4"	AF11S-1/2D
	Filter mesh size: 300 µm	3/4"	AF11S-1/2E
	Filter mesh size: 500 µm	3/4"	AF11S-1/2F
	Filter mesh size: 100 µm	1" - 1 1/4"	AF11S-1A
	Filter mesh size: 20 µm	1" - 1 1/4"	AF11S-1B
	Filter mesh size: 50 µm	1" - 1 1/4"	AF11S-1C
	Filter mesh size: 200 µm	1" - 1 1/4"	AF11S-1D
	Filter mesh size: 300 µm	1" - 1 1/4"	AF11S-1E
	Filter mesh size: 500 µm	1" - 1 1/4"	AF11S-1F
	Filter mesh size: 100 µm	1 1/2" - 2"	AF11S-11/2A
	Filter mesh size: 20 µm	1 1/2" - 2"	AF11S-11/2B
	Filter mesh size: 50 µm	1 1/2" - 2"	AF11S-11/2C
	Filter mesh size: 200 µm	1 1/2" - 2"	AF11S-11/2D
	Filter mesh size: 300 µm	1 1/2" - 2"	AF11S-11/2E
	Filter mesh size: 500 µm	1 1/2" - 2"	AF11S-11/2F

*The filter guide (either with double spin or without double spin feature) is included in the packaging of the replacement filter inserts (AF11DS and AF11S) only for the sizes 3/4" up to 1 1/4"!

Note: approvals only for filter mesh sizes 100 µm



Dimension

Item No.	Item Description	Unit	Quantity	Unit Price	Total Price
1	...	...	...	...	...
2	...	...	...	...	...
3	...	...	...	...	...
4	...	...	...	...	...
5	...	...	...	...	...
6	...	...	...	...	...
7	...	...	...	...	...
8	...	...	...	...	...
9	...	...	...	...	...
10	...	...	...	...	...
11	...	...	...	...	...
12	...	...	...	...	...
13	...	...	...	...	...
14	...	...	...	...	...
15	...	...	...	...	...
16	...	...	...	...	...
17	...	...	...	...	...
18	...	...	...	...	...
19	...	...	...	...	...
20	...	...	...	...	...
21	...	...	...	...	...
22	...	...	...	...	...
23	...	...	...	...	...
24	...	...	...	...	...
25	...	...	...	...	...
26	...	...	...	...	...
27	...	...	...	...	...
28	...	...	...	...	...
29	...	...	...	...	...
30	...	...	...	...	...
31	...	...	...	...	...
32	...	...	...	...	...
33	...	...	...	...	...
34	...	...	...	...	...
35	...	...	...	...	...
36	...	...	...	...	...
37	...	...	...	...	...
38	...	...	...	...	...
39	...	...	...	...	...
40	...	...	...	...	...
41	...	...	...	...	...
42	...	...	...	...	...
43	...	...	...	...	...
44	...	...	...	...	...
45	...	...	...	...	...
46	...	...	...	...	...
47	...	...	...	...	...
48	...	...	...	...	...
49	...	...	...	...	...
50	...	...	...	...	...
51	...	...	...	...	...
52	...	...	...	...	...
53	...	...	...	...	...
54	...	...	...	...	...
55	...	...	...	...	...
56	...	...	...	...	...
57	...	...	...	...	...
58	...	...	...	...	...
59	...	...	...	...	...
60	...	...	...	...	...
61	...	...	...	...	...
62	...	...	...	...	...
63	...	...	...	...	...
64	...	...	...	...	...
65	...	...	...	...	...
66	...	...	...	...	...
67	...	...	...	...	...
68	...	...	...	...	...
69	...	...	...	...	...
70	...	...	...	...	...
71	...	...	...	...	...
72	...	...	...	...	...
73	...	...	...	...	...
74	...	...	...	...	...
75	...	...	...	...	...
76	...	...	...	...	...
77	...	...	...	...	...
78	...	...	...	...	...
79	...	...	...	...	...
80	...	...	...	...	...
81	...	...	...	...	...
82	...	...	...	...	...
83	...	...	...	...	...
84	...	...	...	...	...
85	...	...	...	...	...
86	...	...	...	...	...
87	...	...	...	...	...
88	...	...	...	...	...
89	...	...	...	...	...
90	...	...	...	...</	

*The filter guide (either with double spin or without double spin feature) is included in the packaging of the replacement filter inserts (AF11DS and AF11S) only for the sizes $\frac{3}{4}$ " up to $1\frac{1}{4}$ "!

Note: approvals only for filter mesh sizes 100 µm